

Contact

+49 89 189 41 49-11

info@bay-sensortec.com



Piezo resistive Accelerometer

BST 26C Triaxial


Features

- Anodized Aluminium Housing
- DC Response
- High frequency response
- Low Mass
- Meets SAE J-211

Application

- Crash test
- Shock test

Dimensions

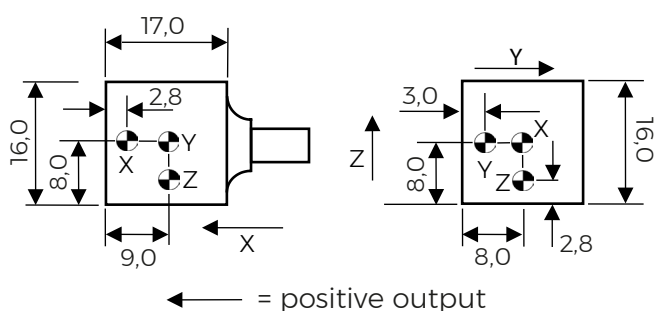


Description

The new model **BST 26C** is a triaxial accelerometer based on piezo resistive technology. With a four-active arm Wheatstone-Bridge (4 wire system) configuration and a selectable damping ratio helps to connect the sensor on all data acquisition systems. The light weight and small size of the sensor makes it easy to mount it on difficult places at the car for a crash test or flutter test application.

Do to the anodized aluminium housing the mounting is easy with a glue. The sensor has 6m very high rugged and flexible 4-wire per axe cable this makes it easy to place it on difficult places it is fixing with glue. As an option, we supply the sensor with a Dallas ID and a Shunt resistor in the connector if it possible.


A calibration for the sensor is obligatory.

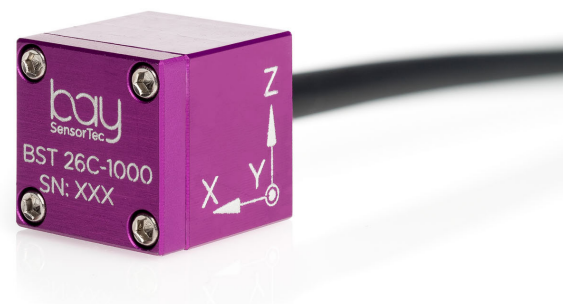

Specifications

Range (g)	100	200	500	1000	2000
Sensitivity (mV/V/g)	0,1	0,06	0,04	0,018	0,016
Frequency 5% (Hz)	1100	1400	2000	2750	3000
Resonance Frequency (kHz)	>6	>8	>13	>18	> 20
Damping ratio	0,4	0,4	0,7	0,7	0,7
Shock limit (g)	4000	4000	6000	8000	8000
Supply voltage	3 to 10 VDC constant				
Zero measurement output	+/- 50 mV				
Thermal Shift Zero	< +/- 0.05 % FSO		(0° to 50° C)		
Thermal Shift Span	- 0.2 % /°C +/- 0.05		(0° to 50° C)		
Operation Temperature	-20° to 80° C				
Transverse sensitivity	3% max.				
Non-Linearity	< 1%				
Housing Material	Aluminium, anodized				
Mounting	with glue				
Dimensions	16.0 x 16.0 x 17.0 mm				
Weight Housing	12 grams without cable				
Weight Cable	30 grams per meter				
Cable	6 m, 12 wire, shielded PUR, AWG 30				

Diagram



Cable Code

x-axis

red / violet = Excitation +
black / violet = Excitation -

green / violet = Signal +
white / violet = Signal -

y-axis

red / grey = Excitation +
black / grey = Excitation -

green / grey = Signal +
white / grey = Signal -

z-axis

red = Excitation +
black = Excitation -

green = Signal +
white = Signal -

Order information

BST 26C-1000-6Z

26C = Model Name
1000 = Range 1000 g
6 = 6 m cable
Z = no connector