

Contact

+49 89 189 41 49-11

info@bay-sensortec.com



Capacitive Accelerometer

BST 58K1 Uniaxial

Features

- Fully Temperature Compensated
- Anodized Aluminium Housing
- Option: Housing with connector
- DC Response
- Voltage Output
- Calibration

Application



- Truck and Busses
- Train
- Motion
- Automotive
- Comfort

Description

The new model BST 58K1 is a uniaxial accelerometer based on variable capacitive technology with a good frequency response. The accelerometers are designed for relatively low amplitudes. Due to the mounting with two screws. The sensor has a 6m very high rugged and flexible cable. This makes it easy to connect the sensor on data acquisition systems. It operates between 8 and 30 VDC unregulated. The sensor is available with a connector in the housing as well. This sensor has more possibilities for mounting.

As an option, we supply the sensor with connector, Dallas ID or TEDS module. A calibration for the sensor is obligatory.

Dimensions

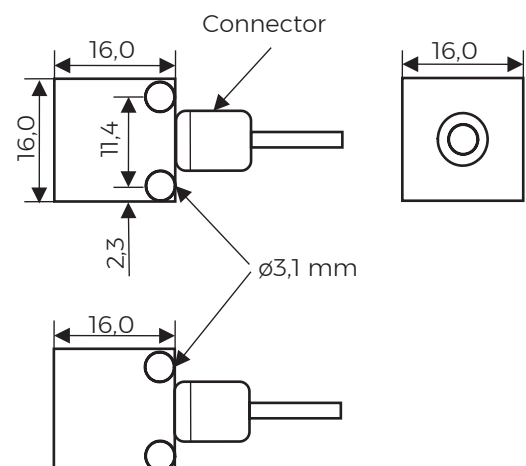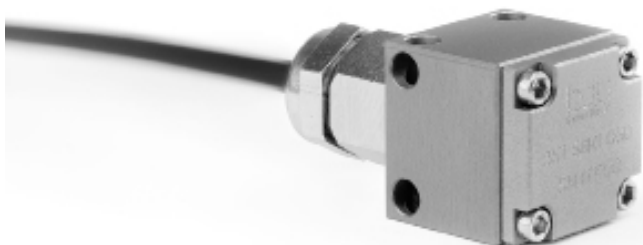

Specifications

Range	from 2 g to 200 g
Sensitivity	10 mV/g up to 2000 mV/g
Supply voltage	8 to 30 VDC unregulated
Power Consumption	max. 10 mA
Zero measurement output	+/- 80 mV typ in Differential Mode (≥ 10 g) +/- 150 mV typ in Differential Mode (2 and 5 g) 2500 mV DC +/- 150 mV in Single Ended Mode
Frequency 5% typ	0 Hz to 1000 Hz
Shock limit	5000 g
Operation Temperature	-20° to 100° C
Dimensions	16,0 x 16,0 x 16,0 mm (l x w x h)
Weight	12 grams
Case material	Aluminium, anodized
Screws	2 pcs M3x25

Individual Data

Range g	2	5	10	25	50	100	200
Frequency Hz	0-90	0-90	0-250	0-400	0-650	0-700	0-850
Sensitivity mV/g	2000	800	400	160	80	40	20
Noise $\mu\text{g}/\sqrt{\text{Hz}}$	7	12	18	25	50	100	200

Cable Code Differential

Red = Excitation + Green = Signal +
Black = Excitation - White = Signal -

Cable Code Single-Ended

Red = Excitation + Black = Excitation - Green = Signal

Order information

BST 58K1-050-6Z
58K1 = Model Name
050 = Range 50 g
6 = 6 m shielded cable
Z = no connector